


# POWER<sub>o</sub>MAX™ ECKFRÄSER 8K\_V


FRÄSERAUFNAHME NACH DIN 8030

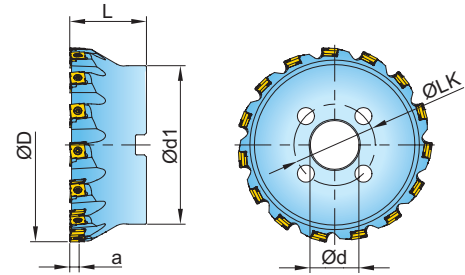

Artikel-Nr.	D	d	d1	LK	L	a	Z		
8K5V050R00 <sup>1)</sup>	50	22	45	-	40	7	6	✓	0,32
8K6V050R00	50	22	45	-	40	7	5	✓	0,32
8K5V063R00 <sup>1)</sup>	63	22	55	-	40	7	8	✓	0,55
8K6V063R00	63	22	55	-	40	7	6	✓	0,55
8K5V080R00 <sup>1)</sup>	80	27	70	-	50	7	11	✓	1,24
8K6V080R00	80	27	70	-	50	7	8	✓	1,24
8K5V100R00 <sup>1)</sup>	100	32	80	-	50	7	14		1,80
8K6V100R00	100	32	80	-	50	7	10		1,80
8K5V125R00 <sup>1)</sup>	125	40	100	-	63	7	18		3,70
8K6V125R00	125	40	100	-	63	7	12		3,70
8K5V160R00 <sup>1)</sup>	160	40	130	66,7	63	7	23		5,00
8K6V160R00	160	40	130	66,7	63	7	15		5,00
8K5V200R00 <sup>1)</sup>	200	60	160	101,6	63	7	29		6,70
8K6V200R00	200	60	160	101,6	63	7	19		6,70

<sup>1)</sup>enge Teilung (nur für kurzspanende Werkstoffe)

## SXH-34R100



Artikel-Nr.	Ausführung	Qualität	IN2005	IN2015	IN2030	IN2040	IN6515		
SXH-34R100	positive Geometrie K0,5								

● = P ● = M ● = K ● = N ○ = S ○ = H

## ZUBEHÖR



SM40-110-00

DS-T155

① = Spanschraube ② = Schraubendreher